
VICO Smart Pendant Installation



Installation Prep

Turn off the circuit breaker switch for your junction box.

Unbox the components and lay them out as shown.

Accessories include 4 bolts and 1 connector. A Phillips screwdriver is required.





2 Select a Mode


Select your preferred color temperature or Smart Mode.

2700K = Warm

3300K = Neutral

4000K = Cool

Smart Mode with the Viro App allows any color temperature between 2700K and 5200K.




Install the Spool

Attach the mount to the junction box with 2 bolts through the curved slots.

Connect the wires from the junction box to the spool with the **connector**. The wires are interchangeable.

Attach the **spool** to the threaded nubs on the mount with 2 bolts.




4 Adjust the Cord Length

Wrap the cord around the spool. Choose a noteh and lock it in place with the nook. Adjust as needed for your desired length.

5 Install the Cover

Slide the cover over the spool and align the antenna with the antenna hole. Screw the cover nut onto the hook to secure it.


VICO Smart Pendant Installation



6 Install the Cap

Slide the cap up over the socket.

Snap the **grommet** into the hole on the top of the cap.

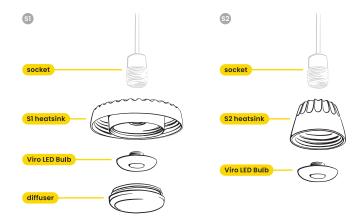

Install the Heatsink and Viro LED Bulb

The Viro Smart Pendant comes in two models, S1 and S2. Refer to the instructions that match your model.

- Screw the viroLED Bulb into the socket. Screw the diffuser into the SI heatsink.
- 2 Lift up the cap and screw the S2 heatsink onto the Socket.

 Screw the VirolED Bulb into the socket.



8 Install the Glass

Lift up the cap and screw the glass into the heatsink. Pull down the cap.

Wipe off any fingerprints with glass cleaner and switch on your circuit breaker.

For Smart Mode, follow the Viro App instructions to set up your new light.